

Table Specifications:

Model	YOQ-E250
Wiremesh Size (mm)	250
Wiremesh Thickness (mm / inch)	3.5-6.5
Refrigeration Capacity	1 ton
(Refrigerant Type)	5
(Refrigerant Temperature °C)	2-15
Weight (kg)	10.94
Dimensions (mm)	8400 * 940 * 1780

Installation:

Enrobing is a process of embedding a wire mesh into a concrete or mortar matrix. This process is used to create a reinforced structure that is resistant to corrosion and provides additional strength. The process involves several steps, including preparing the mesh, applying the concrete, and curing the structure.

The following steps describe the installation process:

1. **Preparation:** Enrobing is performed on a prepared surface. The surface must be clean, smooth, and free of any contaminants. The wire mesh is laid out on the surface in a zigzag pattern.
2. **Application:** Enrobing is applied to the surface of the wire mesh. The application is done in a zigzag pattern, ensuring that the mesh is fully covered.
3. **Curing:** Enrobing is cured in a zigzag pattern. The curing process is essential for the strength and durability of the structure.

The 250mm Enrobing is applied to the surface of the wire mesh. The application is done in a zigzag pattern, ensuring that the mesh is fully covered. The curing process is essential for the strength and durability of the structure. Omron is a brand name for the wire mesh.

& amp; Installation:

1. The first step is to prepare the surface. The surface must be clean, smooth, and free of any contaminants. The wire mesh is laid out on the surface in a zigzag pattern.
2. The second step is to apply the Enrobing. The application is done in a zigzag pattern, ensuring that the mesh is fully covered.

Notes:

The first note is that the Enrobing is applied to the surface of the wire mesh. The application is done in a zigzag pattern, ensuring that the mesh is fully covered. The curing process is essential for the strength and durability of the structure.


The second note is that the Enrobing is applied to the surface of the wire mesh. The application is done in a zigzag pattern, ensuring that the mesh is fully covered. The curing process is essential for the strength and durability of the structure.

Conclusion:







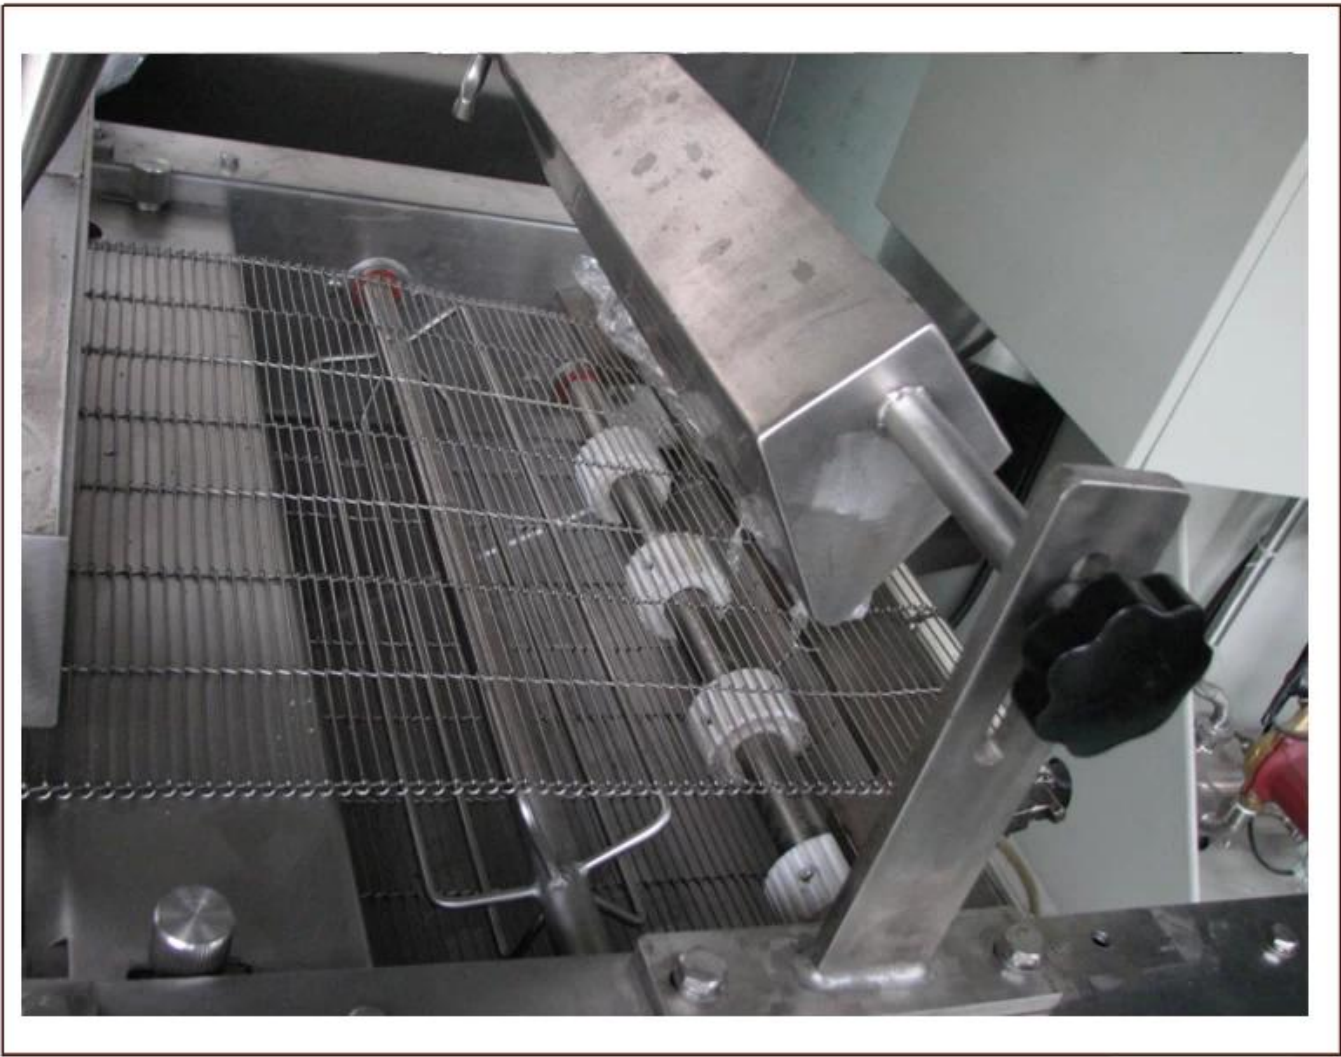

巧克力 巧克力糖:



巧克力糖:





□□□□□□□□:

4 Certificates 

CERTIFICATES FOR QUALITY ASSURANCE

<p>CE</p>  <p>Equipment variety complete, reasonable price !</p>	<p>CE</p> 	<p>Patent Certificate</p> 	<p>ISO</p>  <p>Excellent quality assurance, customer service !</p>	<p>ISO</p> 
--	--	--	---	---

□□□□□□ □□ □□□□:

