

Table Specifications:

Model	YOQ-E250
Wiremesh Size (mm)	250
Wiremesh Thickness (mm / inch)	3.5-6.5
Refrigeration Capacity	1 ton
(Refrigerant Type)	5
(Refrigerant Temperature °C)	2-15
Weight (kg)	10.94
Dimensions (mm)	840 * 940 * 1780

Installation:

Enrobing is a process of applying a protective coating to the surface of a pipe or cable. This process is used to protect the underlying material from corrosion, abrasion, and other environmental factors. The coating is applied in a continuous, uniform layer, ensuring complete coverage of the surface.

The following steps describe the enrobing process:

1. **Preparation:** Enrobing is performed on a pipe or cable that has been cleaned and prepared for coating. The surface must be free of dirt, oil, and other contaminants.
2. **Enrobing:** Enrobing is performed by passing the pipe or cable through a bath of molten coating material. The coating is applied in a continuous, uniform layer.
3. **Post-Enrobing:** Enrobing is performed using a zigzag pattern to ensure complete coverage of the surface.

The 250mm Enrobing is performed using a continuous, uniform layer of coating material. The coating is applied in a zigzag pattern to ensure complete coverage of the surface. The Omron is used to control the enrobing process.

& amp; Installation:

1. The pipe or cable is prepared for enrobing.
2. The pipe or cable is passed through the enrobing bath.

Notes:

1. The enrobing process is performed in a continuous, uniform layer. The coating is applied in a zigzag pattern to ensure complete coverage of the surface.


2. The enrobing process is performed using a zigzag pattern to ensure complete coverage of the surface. The Omron is used to control the enrobing process.

Notes:







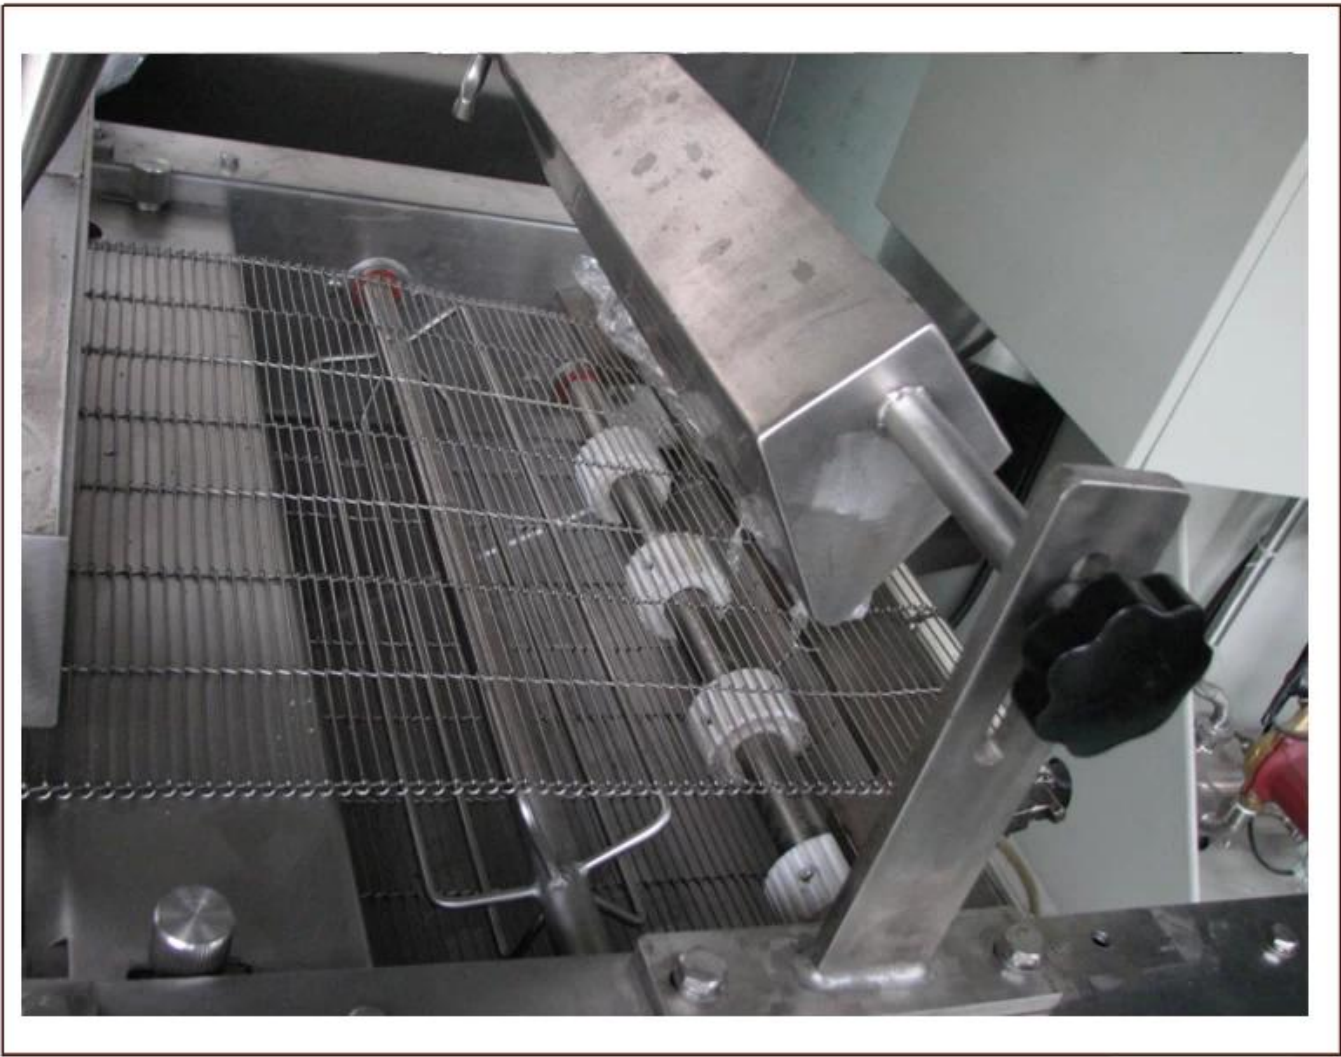

Chocolate enrober:



Chocolate wafer:





□□□□□□□□□□:

4 Certificates 

CERTIFICATES FOR QUALITY ASSURANCE

<p>CE</p>  <p>Equipment variety complete, reasonable price !</p>	<p>CE</p> 	<p>Patent Certificate</p> 	<p>ISO</p>  <p>Excellent quality assurance, customer service !</p>	<p>ISO</p> 
--	--	--	---	---

□□□□□□□□ □□ □□□□:

